




ENCLOSURES
& ENGINEERING



Serving our industry proudly for 55 years!

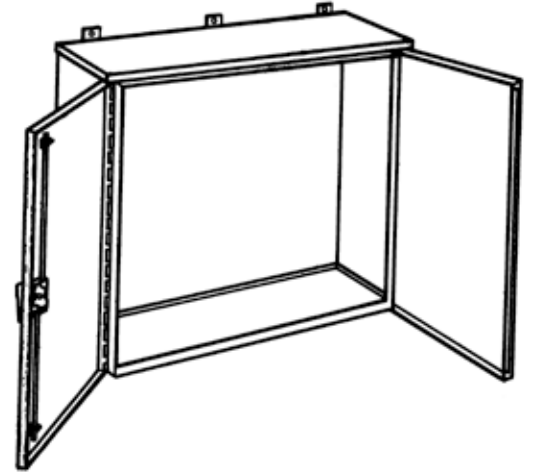

Standard Sizes

| Width | Height | Depth | Width | Height | Depth |
|-------|--------|-------|-------|--------|-------|
| 36 | 30 | 12 | 36 | 30 | 16 |
| 36 | 36 | 12 | 42 | 30 | 16 |
| 42 | 36 | 12 | 42 | 36 | 16 |
| 48 | 30 | 12 | | | |
| 48 | 36 | 12 | | | |

NEMA 3R Hinged Double Door Enclosure

Application

EPI NEMA Type 3R, Hinged Double Door Enclosures are used to protect wiring in outdoor installations. Designed to protect the enclosed equipment against falling rain and sleet; may also be used indoors where dripping water is a problem.

Construction

Made from 16, 14, or 12-gauge galvanized steel. A drip-shield top and smooth seam-free sides front and back, prevent rain, snow or sleet from entering the enclosure. A 3-point latching mechanism, operated by an oil-tight locking handle, holds the doors securely closed. The continuous stainless steel hinge covers are securely fastened with welds along the opposite side. No gasket is provided. Knockouts are not available. Available in Aluminum and Stainless Steel.

Accessories

Panels must be ordered separately. Regular panels, side panels, and panel supports are available.

Finish

A Sherwin Williams ANSI-70 light-dove gray enamel finish inside and out is also available.

Industry Standard

Meets National Electrical Manufacturers Association (NEMA) standard for Type 3R (Rainproof and Sleet-Ice Resistant) enclosures.