




ENCLOSURES
& ENGINEERING



Serving our industry proudly for 55 years!

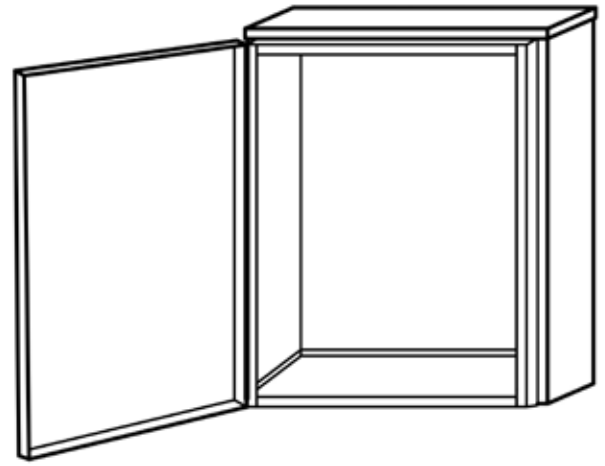

Standard Sizes

| Width | Height | Depth | Width | Height | Depth |
|-------|--------|-------|-------|--------|-------|
| 12 | 16 | 6 | 24 | 24 | 10 |
| 18 | 24 | 6 | 24 | 30 | 10 |
| 24 | 24 | 6 | 24 | 36 | 10 |
| 24 | 30 | 6 | 30 | 36 | 10 |
| | | | 36 | 36 | 10 |
| | | | 36 | 48 | 10 |
| 20 | 20 | 8 | | | |
| 20 | 24 | 8 | | | |
| 24 | 24 | 8 | 24 | 24 | 12 |
| 24 | 30 | 8 | 24 | 30 | 12 |
| 24 | 36 | 8 | 24 | 36 | 12 |
| 30 | 36 | 8 | 30 | 36 | 12 |
| 36 | 36 | 8 | 36 | 36 | 12 |
| | | | 36 | 48 | 12 |

NEMA 3R Large Hinge Cover Enclosure

Application

EPI NEMA 3R Large Hinge Cover Enclosures are used to protect wiring in outdoor installations. Designed to protect enclosed equipment against falling rain and sleet; may also be used indoors where dripping water is a problem.

Construction

Made from 16 or 14-gauge steel. A drip shield top and smooth seam-free sides, front and back prevents rain, snow, or sleet from entering the enclosure. The cover has a continuous stainless steel hinge on the left side and is securely fastened with screws along the opposite side. No gasket is provided. Knockouts are not available. Available in Aluminum and Stainless Steel.

Accessories

Panels must be ordered separately. Mounting feet can also be provided. Locks and latches and pro-for-lock can be furnished.

Finish

The standard finish is G-90 galvanized steel. A Sherwin Williams ANSI-70 light-dove gray enamel finish inside and out is also available.

Industry Standard

Meets National Electrical Manufacturers Association (NEMA) standard for Type 3R (Rainproof and Sleet-Ice Resistant) enclosures. UL50 Certification pending.