




ENCLOSURES
& ENGINEERING



Serving our industry proudly for 55 years!

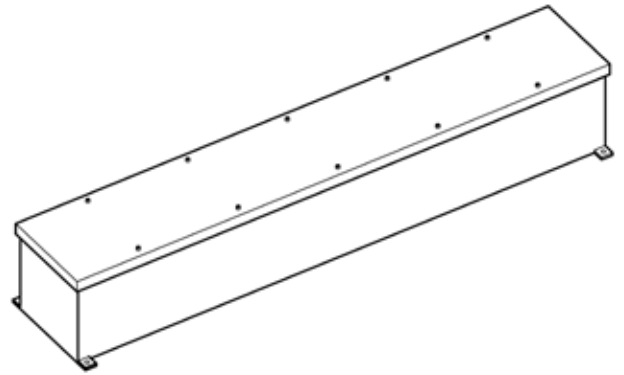

Standard Sizes

| Height | Depth | Length | Height | Depth | Length |
|--------|-------|--------|--------|-------|--------|
| 4 | 4 | 12 | 10 | 10 | 24 |
| 4 | 4 | 24 | 10 | 10 | 36 |
| 4 | 4 | 36 | 10 | 10 | 48 |
| 4 | 4 | 48 | 10 | 10 | 60 |
| 4 | 4 | 60 | 10 | 10 | 72 |
| 4 | 4 | 72 | | | |
| | | | 12 | 12 | 24 |
| 6 | 6 | 12 | 12 | 12 | 36 |
| 6 | 6 | 24 | 12 | 12 | 48 |
| 6 | 6 | 36 | 12 | 12 | 60 |
| 6 | 6 | 48 | 12 | 12 | 72 |
| 6 | 6 | 60 | | | |
| 6 | 6 | 72 | | | |
| | | | | | |
| 8 | 8 | 12 | | | |
| 8 | 8 | 24 | | | |
| 8 | 8 | 36 | | | |
| 8 | 8 | 48 | | | |
| 8 | 8 | 60 | | | |
| 8 | 8 | 72 | | | |

NEMA 4 Screw Cover Wireway

Application

EPI NEMA 4 JIC Screw Cover Wireway is designed to protect wiring in areas which may be regularly hosed down or are very wet. Suitable for use outdoors, or in dairies, breweries, and similar installations.

Construction

Made from 16 or 14-gauge galvanized steel. All seams are continuously welded and there are no holes or knockouts. The covers have gasket with oil resistant adhesive. Exterior screws are stainless steel and provide a complete seal between covers and bodies (Covers not to exceed 72"). Exterior mounting feet can be provided for mounting.

Finish

The standard Sherwin Williams ANSI-70 painted light-dove gray enamel inside and out. Additional finishes are available.

Industry Standard

Meets National Electrical Manufacturers Association (NEMA) standard for Type 4 (Water Tight and Dust Tight), Type 12 (Industrial Use), and Type 13 (Oil Tight and Dust Tight) enclosures. Also conforms to the Joint Industrial Council (JIC) EGP-1-1967.

UL50E Certification pending.