




ENCLOSURES
& ENGINEERING



Serving our industry proudly for 55 years!

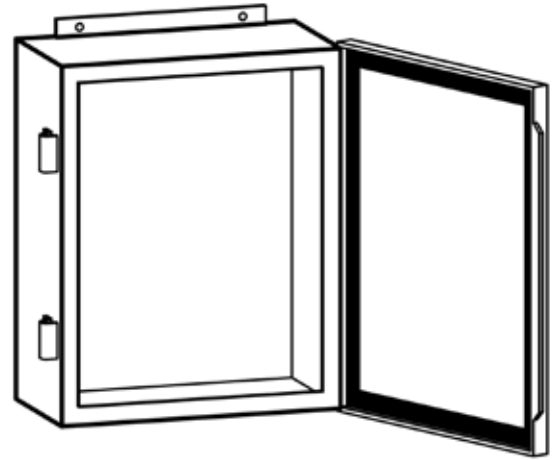

Standard Sizes

Width	Height	Depth
4	4	4
4	6	4
6	6	4
6	8	4
8	8	4
8	10	4
6	8	6
8	10	6
10	10	6
12	12	6
12	14	6
14	16	6

NEMA 4X JIC Hinge, Clamp Cover Enc

Application

EPI NEMA 4X JIC, Continuous stainless steel hinge, Clamp Cover Enclosures are designed for use in areas which may be regularly hosed down or are very wet. They are suitable for use in dairies, breweries, and similar installations. They are also designed for use in areas where serious corrosion problems exist.

Construction

Made from 16 or 14-gauge stainless steel (Type 304 2B). Has external screw clamps on three sides of the continuous stainless steel hinge cover. The screw clamps are quick and easy to operate. The neoprene gasket is attached to the cover with oil-resistant adhesive. All seams are continuously welded and there are no holes or knockouts. External feet are furnished for mounting. Type 316 SS is available.

Accessories

Panels must be ordered separately. Provisions for padlocking and other type hardware can be provided if specified. Stainless steel panels are available.

Finish

The standard finish is a stainless steel type 304 2B series. Type 316 SS is available.

Industry Standard

Meets National Electrical Manufacturers Association (NEMA) standard for Type 4 (Water Tight and Dust Tight) and Type 4X (Water Tight, Dust Tight and Corrosion Resistant). JIC EGP-I-1967. UL50E Certification pending.