ENCLOSURES
& ENGINEERING

55 YEARS

Serving our industry proudly for 55 years!

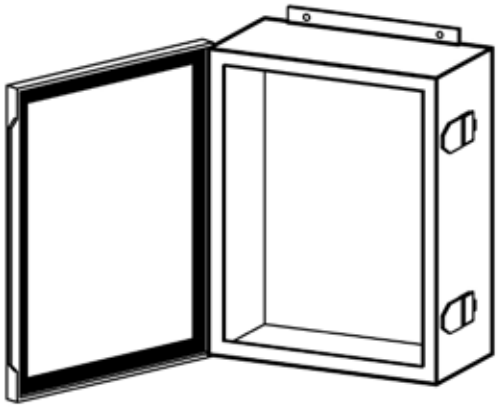

Standard Sizes

Width	Height	Depth
12	16	6
16	16	6
16	24	6
24	24	6
24	30	6
24	36	6
12	16	8
16	20	8
24	24	8
24	30	8
24	36	8
30	30	8
30	36	8
30	42	8
16	20	10
24	24	10
24	30	10
30	36	10
30	48	10
36	48	10
36	60	10

Width	Height	Depth
16	20	12
24	24	12
24	30	12
24	36	12
30	30	12
30	36	12
30	42	12
30	72	12
36	36	12
36	42	12
36	48	12
30	36	16
36	48	16

NEMA 4X JIC New Design HC QR Enc.

Application
EPI NEMA 4X JIC, Stainless Steel Hinge Cover Quick Release Enclosures are designed for use in areas which may be regularly hosed down or are very wet. They are suitable for use in dairies, breweries, and similar installations. They are also designed for use in areas where serious corrosion problems exist.

Construction
Made from 16 or 14-gauge stainless steel (Type 304 2B). Stainless steel external Quick Release latches secure the gasketed hinge cover. The releases are quick and easy to operate and require no tools. The neoprene gasket is attached to the cover with oil-resistant adhesive. All seams are continuously welded and there are no holes or knockouts. External feet are furnished for mounting.

Accessories
Panels must be ordered separately. Provisions for padlocking and other hardware can be provided if specified. Stainless steel panels are available.

Finish
The standard finish is a stainless steel type 304 2B series. Type 316 SS is available.

Industry Standard
Meets National Electrical Manufacturers Association (NEMA) standard for Type 4 (Water Tight and Dust Tight) and Type 4X (Water Tight, Dust Tight and Corrosion Resistant). JIC EGP-1-1967. UL50E Certification pending.

©January 2025