




ENCLOSURES
& ENGINEERING



Serving our industry proudly for 55 years!

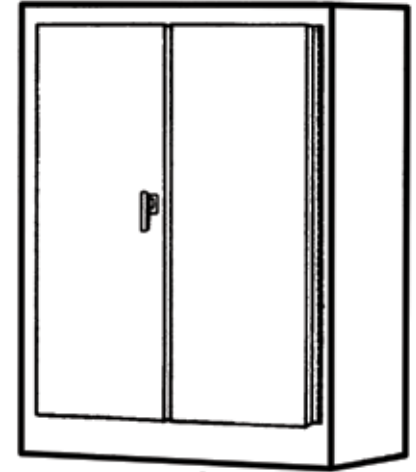

Standard Sizes

Width	Height	Depth
48	60	18
48	72	18
60	72	18
72	72	18
48	72	24
60	72	24
72	72	24
72	90	24

NEMA Type 12 Dbl Door Freestanding Enc.

Application

EPI NEMA Type 12 Double Door Freestanding Enclosures are designed to house electrical controls, terminals, and instruments. They provide protection from dust, oil, and dripping water in indoor use. Enclosures are extra deep for applications where added interior space is needed.

Construction

Made from 14, 12, or 10-gauge steel. All seams are continuously welded and there are no holes or knockouts. The neoprene door gaskets are attached with oil resistant adhesive. These enclosures have uniquely gasketed, overlapping doors, which eliminate the need for a center post. A 3-point latching mechanism operated by an oil tight handle holds the doors securely closed. Heavy gauge continuous stainless steel hinges support each door. Each enclosure has body stiffeners. Panel supports can be provided to support panel and aid in panel installation. Key locking handles are optional. Available in Aluminum and Stainless Steel.

Accessories

Panels must be ordered separately. Regular panels, side panels, and panel supports are available. Floor stand kits are available for factory installation on enclosures. Drip shield kits protect door and door hardware from dripping water and settling dust.

Finish

The standard finish is Sherwin Williams ANSI-70, light-dove gray inside and out. Panels are the same.

Industry Standard

Meets National Electrical Manufacturers Association (NEMA) standard for Type 12 (Industrial Use) enclosures.

UL50E Certification pending.