




ENCLOSURES  
& ENGINEERING



Serving our industry proudly for 55 years!

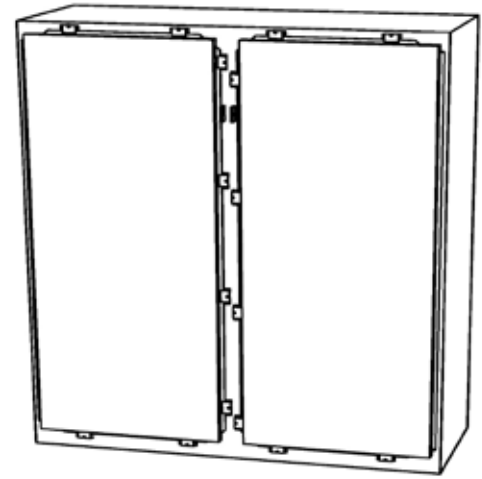

## Standard Sizes

| Width | Height | Depth |
|-------|--------|-------|
| 48    | 60     | 18    |
| 48    | 72     | 18    |
| 60    | 72     | 18    |
| 72    | 72     | 18    |
| 48    | 72     | 24    |
| 60    | 72     | 24    |
| 72    | 72     | 24    |
| 72    | 90     | 24    |

## NEMA Type 4 Dbl Door Freestanding Enc.

### Application

EPI NEMA Type 4 Double Door, Free Standing Enclosures designed to house electrical controls, terminals, and instruments in areas, which may be regularly hosed down or are in wet areas. Suitable for use outdoors, or in dairies, breweries, and similar installations.

### Construction

Made 14, 12, or 10-gauge steel. All seams are continuously welded. There are no holes or knockouts. A lip is provided on all three sides of the door preventing dirt and liquid from dropping into the enclosure. Clamps are provided on three sides of the doors to ensure a watertight seal with oil resistant neoprene gaskets. A center post is provided for extra rigidity. All exterior hardware (such as clamps, clamp screws, hinge pins, etc) are stainless steel. A heavy gauge, continuous stainless steel hinge supports each door. A hasp and staple are provided on each door for padlocking.

### Accessories

Panels must be ordered separately.

### Finish

The standard finish is Sherwin Williams ANSI-70, light-dove gray enamel finish inside and out. Other finishes are available for specific applications.

### Industry Standard

Meets National Electrical Manufacturers Association (NEMA) standard for Type 4 (Watertight and Dust-tight) and Type 13 (Industrial use) enclosures.

UL50E Certification pending.