




ENCLOSURES  
& ENGINEERING



Serving our industry proudly for 55 years!

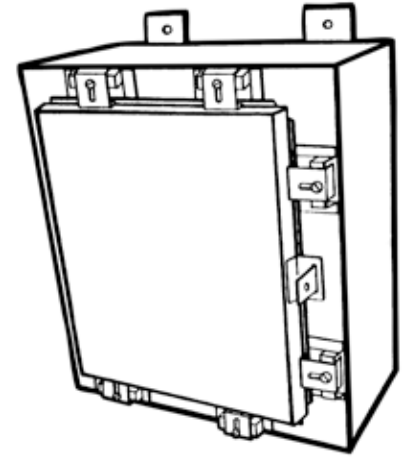

## Standard Sizes

Width	Height	Depth	Width	Height	Depth
12	16	6	16	20	12
16	16	6	20	24	12
16	20	6	24	24	12
16	24	6	24	30	12
20	20	6	24	36	12
20	24	6	30	30	12
20	30	6	30	36	12
24	24	6	30	42	12
24	30	6	30	72	12
24	36	6	36	36	12
			36	42	12
			36	48	12
12	16	8			
16	20	8			
20	20	8	30	36	16
20	24	8	36	48	16
20	30	8			
24	30	8			
24	36	8			
30	30	8			
30	36	8			
30	42	8			
16	20	10			
20	24	10			
24	30	10			
30	36	10			
30	48	10			
36	48	10			
36	60	10			

## NEMA Type 4X SS Wall Mount Enclosure

### Application

EPI NEMA Type 4X Stainless Steel Wall Mount Enclosures are designed to house electrical controls, terminals, and instruments in areas which may be regularly hosed down or are very wet. These enclosures are used in areas where serious corrosion problems exist. Suitable for use outdoors, or in dairies, breweries, petrochemical plants, sewage plants, food processing areas, packing plants, and similar installations.

### Construction

Made from 16 or 14-gauge stainless steel (Type 304). All seams are continuously welded. There are no holes or knockouts. A lip is provided on three sides of the door, increasing strength and preventing dirt and liquids from dropping into the enclosure. The closed cell neoprene gasket is attached with oil resistant adhesive. The stainless-steel door clamps are quick and easy to operate. A hasp and staple are provided for padlocking. External mounting feet are furnished for mounting.

### Finish

These enclosures are unpainted. A Type 304 2B SS is furnished. Interior panels are painted Sherwin Williams ANSI-70. A Type 316 SS is also available.

### Industry Standard

Meets National Electrical Manufacturers Association (NEMA) standard for Type 4 (Water Tight and Dust Tight), Type 4X (Water Tight, Dust Tight, and Corrosion Resistant), Type 12 (Industrial Use) and Type 13 (Oil Tight and Dust Tight) enclosures. JIC standard EGP-1-1967.