




ENCLOSURES
& ENGINEERING



Serving our industry proudly for 55 years!

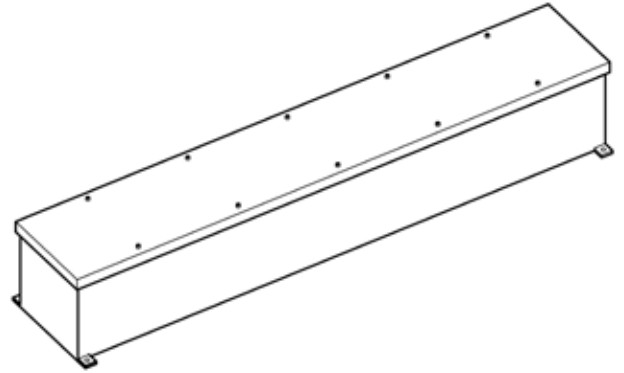

Standard Sizes

Height	Depth	Length	Height	Depth	Length
4	4	12	10	10	24
4	4	24	10	10	36
4	4	36	10	10	48
4	4	48	10	10	60
4	4	60	10	10	72
4	4	72			
			12	12	24
6	6	12	12	12	36
6	6	24	12	12	48
6	6	36	12	12	60
6	6	48	12	12	72
6	6	60			
6	6	72			
8	8	12			
8	8	24			
8	8	36			
8	8	48			
8	8	60			
8	8	72			

NEMA 4 Aluminum Screw Cover Wireway

Application

EPI NEMA 4 JIC .100 or .125 Aluminum (Type 5052H) Screw Cover Wireway is designed to protect wiring in areas which may be regularly hosed down or are very wet. Suitable for use outdoors, or in dairies, breweries, sewage plants, petrochemical plants and similar installations.

Construction

Made from .100 or .125 Aluminum (Type 5052H). All seams are continuously welded and there are no holes or knockouts. The covers have gasket with oil resistant adhesive (Covers not to exceed 72"). The cover is fastened with stainless steel self-tapping hex-head screws and provides a complete seal between covers and bodies. Exterior mounting feet can be provided for mounting.

Finish

These enclosures are unpainted. All covers and bodies are .100 or .125 Aluminum (Type 5052H) ground smooth and free of sharp edges.

Industry Standard

Meets National Electrical Manufacturers Association (NEMA) standard for Type 4 (Water Tight and Dust Tight), Type 12 (Industrial Use), and Type 13 (Oil Tight and Dust Tight) enclosures. Also conforms to the Joint Industrial Council (JIC) EGP-1-1967.