




ENCLOSURES
& ENGINEERING



Serving our industry proudly for 55 years!

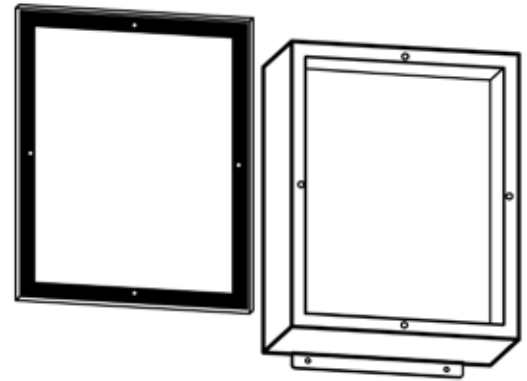

Standard Sizes

| Width | Height | Depth |
|-------|--------|-------|
| 4 | 4 | 4 |
| 4 | 6 | 4 |
| 6 | 6 | 4 |
| 6 | 8 | 4 |
| 8 | 8 | 4 |
| 8 | 10 | 4 |
| | | |
| 6 | 8 | 6 |
| 10 | 10 | 6 |
| 12 | 12 | 6 |
| 12 | 14 | 6 |
| 14 | 16 | 6 |

NEMA 4 JIC Screw Cover Enclosure

Application

EPI NEMA 4 JIC Screw Cover Enclosures are designed for use in areas which may be regularly hosed down or are very wet. They are suitable for use in dairies, breweries, and similar installations.

Construction

Made from 16 or 14-gauge steel. All seams are continuously welded. There are no holes or knockouts. The covers are attached with stainless steel self-tapping screws. Covers are gasketed with a neoprene gasket attached with an oil resistant adhesive. External feet are furnished for mounting. Panels must be ordered separately.

Finish

The standard finish is Sherwin Williams ANSI-70, light-dove gray inside and out. Additional finishes can be provided.

Industry Standard

Meets National Electrical Manufacturers Association (NEMA) standard for Type 4 (Water Tight and Dust Tight), Type 12, (Industrial Use) and Type 13 (Oil Tight and Dust Tight) enclosures. Also Meets Joint Industrial Council (JIC) standard EGP-1-1967.